

# AJ&D Chapelhow (Cliburn) Ltd

Crafting fine timber windows and doors since 1961


## 3D Door Hinges

### Adjustment of the hinges to alter the height

- To be carried out without un-hanging the door.
- Open the door by approx 90 degrees & fix by wedging.
- Remove the centre screw - if fit. (see diagram)
- Loosen the two clamping screws (fig A) of each hinge.
- Adjust the height ( +/- 3mm) and the depth ( +/- 2mm) of the door leaf by moving the door carefully in the appropriate direction and fasten the clamping screws again.
- \* Replace the central screw.

### Lateral adjustment to hinges to alter the width

- Adjust the lateral position of hinges ( +/- 2mm) by turning the upper and the lower screw (figure B) of each hinge. Turn clockwise to increase the width and Anti Clockwise to decrease the width.
- Use an Allen key 4mm for all actions and locating.
- (If you require the removal of door start from the bottom)

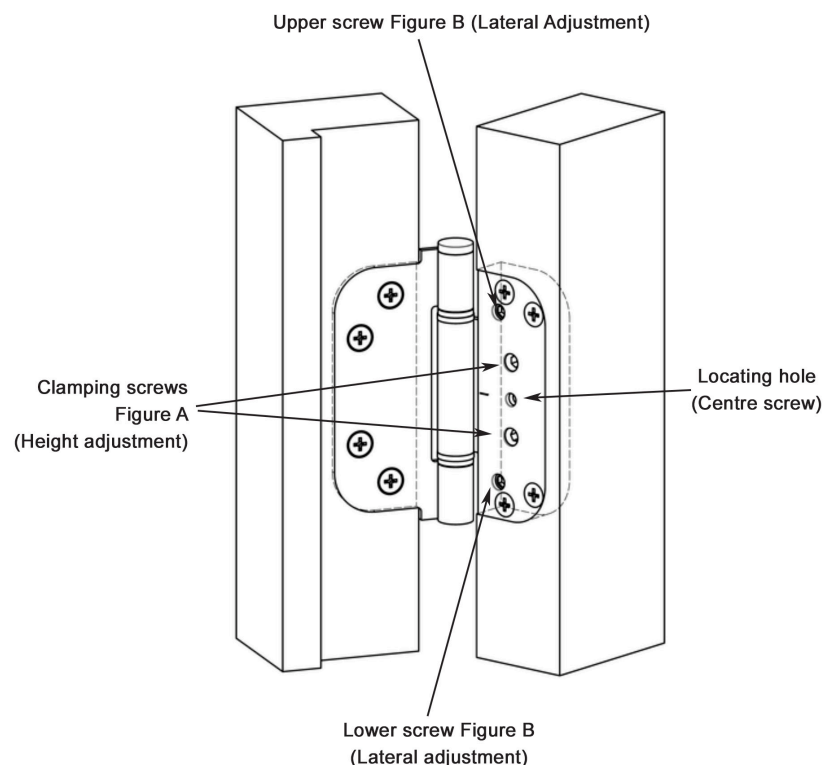

#### PLEASE NOTE:

- Wedges should be used to support door if the two locking studs are to be released for adjustment.
- The Locking Studs must be tightened securely after any adjustment
- It is the responsibility of the contractor / installer to ensure that the information sheet is handed to the end user.

T: 01931 585 101 or 01931 714 289

Email: [enquiries@ajdchapelhow.co.uk](mailto:enquiries@ajdchapelhow.co.uk) • [www.ajdchapelhow.co.uk](http://www.ajdchapelhow.co.uk)

LING PARK • CLIBURN • PENRITH • CUMBRIA • CA10 3AL